

The Modec Group

Corporate Office:

Dubai - UAE

P.O.Box : 95194, Dubai

Tel. : +971 4 3230033

Tel. : +971 4 3605554

Fax : +971 4 3230505

Email : info-eol@modec.ae

Main Branch

Tel. : +971 4 3395447

Fax : +971 4 3395448

Email : info@modec.ae

Gypsum Division

Tel. : +971 4 3385851

Fax : +971 4 3387870

Email : gypsum@modec.ae

Abu Dhabi

Tel. : +971 2 5528566

Fax : +971 2 5528577

Email : info@modec.ae

Muscat - Oman

Tel. : +968 24502815 / 24503656

Fax : +968 24505031 / 24502816

Email : infooman@modec.ae

Salmabad - Bahrain

Tel. : +973 17 789047

Fax : +973 17 789046

Email : infobahrain@modec.ae

Doha - Qatar

Tel/Fax: +974 44667282

Email : syed@modec.ae

Baku - Azerbaijan

Tel. : +994 12 497 1815/ 497 8980

Fax : +994 12 497 4209

Email : infobaku@modec.ae



www.modec.ae

TIMBER

MDF

IVENEER

PLYWOOD

LAMINATES

WOODEN FLOORING

GI PROFILES

GYPSUM BOARDS

CALCIUM SILICATE BOARDS & TILES

ALUM. CEILING TILES

GYPSUM VINYL TILES

MODEC
BUILDING MATERIALS TRADING

T-GRIDS

JOINT COMPOUND

IRON MONGERY

ALUM. COMPOSITE PANEL

JOTUN PAINTS

ELECTRICAL ITEMS

TOOLS

ACRYLIC SHEETS

HARDWARE

FORMICA

HOMAPAL

We turn your vision into reality

MODEC Building Materials was established in May 2005 that is located at the developing and economy-booming city of Dubai. Our commitment is to provide our customer with highest quality building materials at reasonable price and assurance of delivering orders on time.

Since then, our business focuses on the distribution of the following products having subsequent categories;

In Addition to this, **MODEC** is now the EXCLUSIVE DISTRIBUTOR FOR FORMICA & HOMAPAL BRAND LAMINATES for the UAE, Oman, Bahrain and Qatar markets.

With the persistence and effort of the managing partners, our business is continuously progressive and expansive. Our branches are now in Sultanate of Oman and Kingdom of Bahrain, Qatar and Azerbaijan to meet the needs of our customer .We are exporting our products in countries like Iraq, Kuwait, Saudi Arabia, Jordan, Lebanon, CIS & Africa.

We are confident that **MODEC** will provide you superior service at competitive prices. Ensuring marketplace and customer satisfaction are the driving forces behind all we do, we understand that listening to our customers is important. We conduct regular communication with design leaders and consumers, which helps us to do the trading of our products that are fit for purpose and meet market demands.

Should you have any query or information you may want to know, please feel free to contact us and we will be grateful to discuss with you more about our products.

LAMINATES

Formica Laminates	1 - 2
Formica Laminates Applications	3 - 4
Homapal Laminates	5
Homapal Laminates Applications	6

MDF

Plain MDF/Moisture Resistant MDF	7
Fire Resistant MDF/Slotted MDF	8
Melamine MDF/Backing Panel	
Veneer MDF	

EDGE BANDING

Melamine/Edge/Veneer/Metal	8
----------------------------	---

BOARDS

Soft Board/Bitumen Boards	8
Hard Boards	

TIMBER

American Hard Wood	
African Hard Wood	
European Hard Wood	9 - 10
Far-East Timber	
White Wood/Soft Wood	

PLYWOOD

Film Face Plywood	
WBP Plywood Commercial Plywood	
Flexible Plywood	11 - 12
Veneered Plywood/Decor Plywood	
Tubular Chipboard/Wooden Flooring	

STEEL

Stainless Steel/Aluminium	
Steel Tubing	13
& Piping	

COMPOSITE CLADDING

Alubond.USA Composite Panels	14
------------------------------	----

GYPSUM & METAL PROFILES

Knauf Products	15
Access Panel	16
Vinyl Gypsum Ceiling Tiles	17 - 18
Furring Ceiling System	19
Drywall Partition System	20
Calcium Silicate Board & Tiles / Cement Fiber Board	21
Ceiling Suspension Grids	22
Mineral Fiber Ceiling Tiles	23
Aluminium Ceiling Tiles	24

Carpet Tiles/Raised Floor	25
---------------------------	----

HARDWARE

Furniture Fittings	26
Furniture & Door Fittings	27 - 28
Fasteners & Construction Items	29
Power Tools & Hand Tools	30
Safety & Electricals	31 - 32
Adhesive Products	33
Paints & Paint Accessories	34
Jotun Paints	35
Aluminium Profiles	36
Packing Materials & Acrylic	37
	38



Formica Products



Formica High Pressure Laminate (HPL)

HPL is manufactured through fusing multiple layers of impregnated paper under high pressure and temperature to create a hardwearing, durable and hygienic surfacing material. The Formica® Colors, Patterns and Woods ranges of high-pressure laminates are available in horizontal grade postforming (HGP) as standard. Flame retardant HPL (VFP grade) is also available on request. HPL is robust and hygienic and bonded to a substrate offers countless design and application opportunities for a wide variety of environments. It can be used on vertical and horizontal surfaces and can be treated to hold a curve, making it an ideal solution for furniture pieces, column casing, wall paneling, countertops, doors and more.


AR Plus® High Gloss Colors and Woods

AR Plus High Gloss offer a hassle-free, durable high gloss laminate with twice the surface performance of standard gloss laminate. The AR Plus technology delivers a gloss surface that is highly resistant to scuffs and mar abrasions, extending the gloss laminate life cycle. AR Plus high gloss laminates are 1.2mm thickness postforming grade. Due to the increased thickness of this material a minimum radius of 15mm is recommended. Flame retardant AR Plus laminate (FAR grade) is also available on request.



ColorCore® by Formica Group

ColorCore® is a dramatic and exciting surfacing material, in 1.3mm thickness, that features the high performance characteristics of Formica® decorative laminates with the added dimension of solid through colour. This homogeneous colour obviates the dark line sometimes associated with laminate edges and permits decorative effects to be created by engraving and sandblasting. ColorCore in Matte 58 texture increases levels of wearability and reduces the visual impact of chips and scratches. It is ideal for applications.

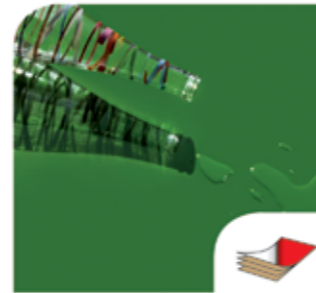


DecoMetal® by Formica Group

DecoMetal® is created using real metal foils over a laminate core to create stunning metallic laminates that are durable but very light compared to sheet metal. Textures and patterns are applied to some metallic laminates to create outstanding effects. A complete range of striking colours, patterns and finishes are available and it is perfect for retail and hospitality environments. Nominal thickness varies depending upon metallic foil and texture.



Chemtop®2 by Formica Group

Chemtop®2 features an advanced chemical resistant surface, created by specialist papers and incorporating a remarkable chemical resistant coating during manufacture. Chemtop2 is ideal for use in high stress environments, such as hospitals, clinics and laboratories, where relatively harsh acids, alkalis, corrosive salts and other destructive or staining substances are used. It can be used for all horizontal and vertical surface applications, including work surfaces, splashbacks, and in the construction of cabinets and fume cupboards.

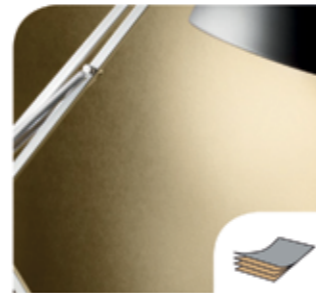

Formica® Compact

Formica® Compact is a high pressure structural laminate, built up from multiple layers of Kraft paper to produce a laminate in thicknesses from 2mm to 20mm. It has a decorative face on both sides and is ideal for interior use in washroom cubicles or locker doors, wall panels or laboratory furniture. It is particularly suited to use in high humidity, high impact areas. With a density of 14kg/m² (for 10mm thickness), Compact is impressively strong and damage resistant and has remarkable structural stability, requiring no substrate support in thicknesses over 6mm.




VIVIX® Architectural Panels by Formica Group

VIVIX® solid phenolic, engineered exterior façade panels have a decorative surface on both sides. VIVIX panels are resistant to impact and abrasion, weather and UV rays. They are also easily machined and can be cut into a variety of shapes and sizes and they can also be field modified as needed. They are available in 6, 8 and 10mm thicknesses. VIVIX panels can be used to clad an entire building, create individual design features or used in combination with other cladding materials. Ideal for highlighting individual architectural features, VIVIX panels can also be used for exterior applications such as balconies, soffits, decorative screening and fencing or to accent an entrance way of a building.

Formica® Bespoke Laminate

The Formica® Bespoke laminate service is structured to facilitate virtually limitless, unique design captured in Formica® High Pressure Laminate (HPL) or Compact. Customised images and eye-catching graphics encapsulated in laminate can be used to create bespoke furniture, feature wall coverings, cubicles, door skins, signage and much more. The Formica Bespoke service offers both screen-print and digital print solutions, to ensure the optimum replication of any design. It provides the ultimate flexibility allowing the designer to create a unique pattern or design, capture a photograph or corporate logo.

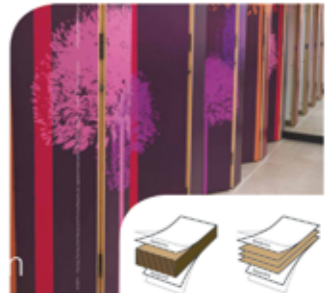

Applications

The portfolio of laminate options from Formica Group have been specially selected in response to the latest global design trends and the needs of demanding environments. Offering inspiration and choice for beautiful and contemporary surfaces, Formica® products can be used for a wide range of applications. The extensive colour families, textures and patterns, innovation allow designers, specifiers and architects to create unique and tailored designs that are high performing, durable and sustainable.


Use the Formica product table to find typical applications

RANGE	Living	Working	Travelling	Learning	Shopping	Leisure	Healthcare	Exterior	Hospitality
HPL	•	•	•	•	•	•	•		•
AR Plus®	•	•			•	•			
Compact		•	•	•	•	•	•		•
Chemtop®2		•		•			•		•
DecoMetal®	•	•			•	•			
ColorCore®	•	•	•	•	•	•	•		
Solid Surfacing	•	•		•	•	•	•		•
VIVIX®								•	



SURFACE FINISHES

The choice of surface finish is just as important to the functionality of the laminate as it is to the aesthetics.



AR Plus®



Gloss®



Matte58™



NDF™



Rigato™

SURFACE FINISHES

The choice of surface finish is just as important to the functionality of the laminate as it is to the aesthetics.



Midgrain



MicroDot™



Naturelle™



Sculpted™



Softmat





Homapal Products



Metal

Homapal metal laminates with surfaces of aluminium, copper, stainless steel and brass are offered in our standard product range in a huge variety of classic, modern, design orientated and in some cases, hand made decors. The product range for 2011 includes 18 new additions giving a total choice of 89 decors.



Magnetic Boards

Homapal magnetic boards combine a powerful magnetic effect with decors in different basic and trend colours and even real metal surfaces. Depending on the decor the surfaces are suitable for writing on with board markers or chalk. Certain finishes are suitable for image projection with reduced light reflection. The product range for 2011 adds 11 new colours to the existing 11 established decors.

Wood

Homapal Holz laminates with surfaces of real wood are available in traditional, classic and stylish decors. The re-constituted veneers we are processing come from controlled areas of sustainable, cultivated land. The 2011 product range includes 26 new decors in different colours and structures.

MADE IN GERMANY

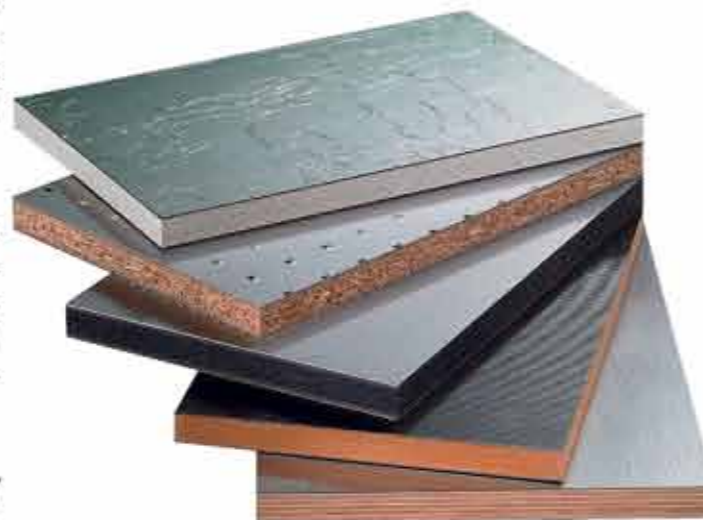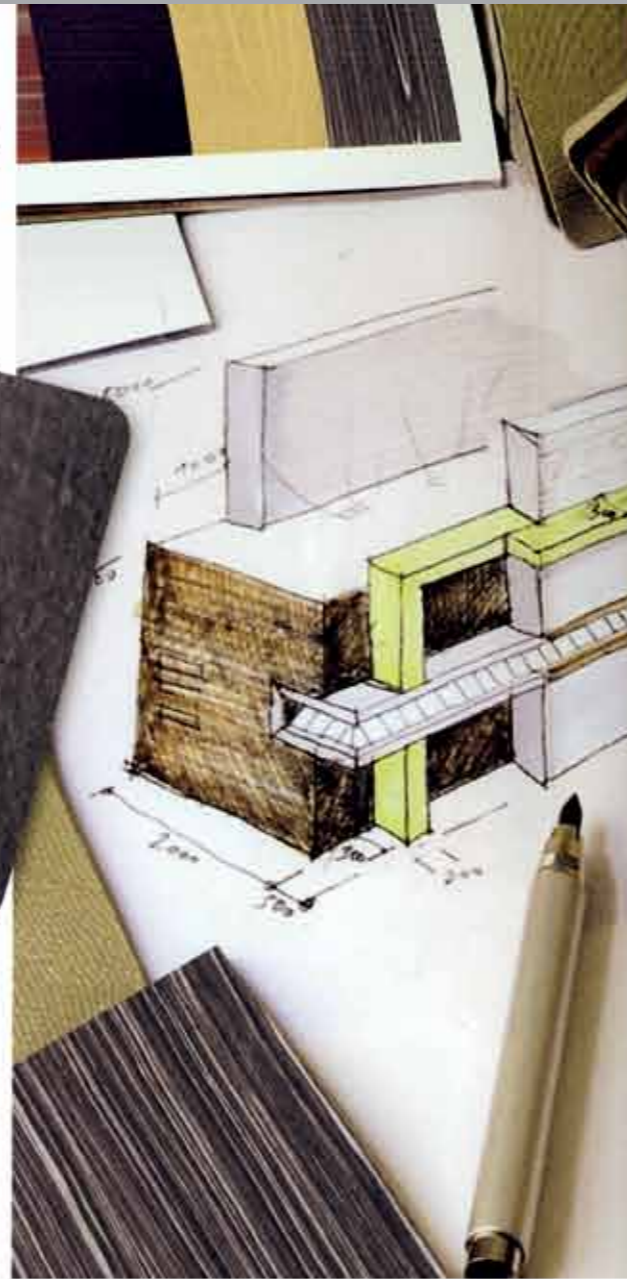

METAL LAMINATES



MAGNETIC LAMINATES




WOOD LAMINATES





PLAIN MDF

THICKNESS

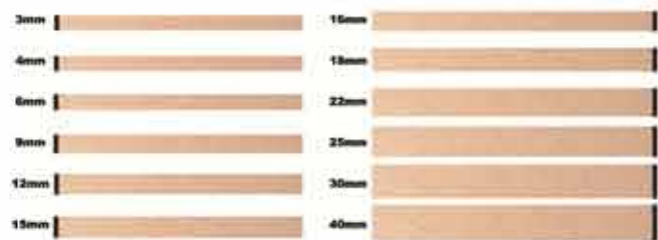

Standard Size : 4' x 8'

Also available in 6' x 12', Thickness 12mm & 18mm



MOISTURE
RESISTANT
MDF



FIRE
RETARDANT
MDF

Standard Size : 4' x 8'
Thickness : 6, 12 & 18mm



SLOT BOARD

- Plain MDF
- Melamine MDF
- Matching Backing Panel
- Veneered MDF
- Slot Board
- Moisture Resistant MDF
- Fire Retardant MDF



MELAMINE & BACKING
PANEL MDF

Standard Size : 4' x 8'
Thickness : 3mm, 6mm, 9mm, 12mm & 18mm
one side & both sides



VENEERED MDF



EDGE BANDING

Thickness: 0.4 to 3 mm, Width: 22, 28, 32, 38 & 40mm



Melamine & PVC Edge Banding



Metal Edge Banding



T-Edge Banding



Veneer Edge Banding



SOFT BOARD

Size : 1.20 x 2.40 x 12mm



BITUMEN BOARD

Size : 1.22 x 2.2 x 12 & 18mm



HARDBOARD

Size : 1.22 x 2.44 x 2.4 to 4mm

Canfor White Wood S4S ▼



WHITE WOOD ▼



MAHOGANY ▼

S/D & K/D



SIZE
2" X 6" Wider, Length 7' & up
3" X 6" Wider, Length 7' & up

RED MERANTI ▼



OKUME ▼

SIZE: 2" X 6"/ 2" X 8"/ 2" X 10"/ 2" X 12", Length 7' & up
3" X 6"/ 3" X 8", Length 7' & up



BURMA TEAK ▼

PLANKS

S/D & K/D



AFRICAN TEAK DABEMA

S/D & K/D SIZE: 2" X 6" Wider, Length 7' & up
3" X 6" Wider, Length 7' & up



BEECH WOOD (Romanian) ▼

S/D & K/D SIZE: 2" X 6" Wider, Length 7' & up
3" X 6" Wider, Length 7' & up



POLLMEIER BEECH ▼

K/D (Germany)

SIZE: 2" X 6" Wider, Length 7' & up



RED OAK ▼

S/D & K/D SIZE: 2" X 6" Wider, Length 7' & up
3" X 6" Wider, Length 7' & up



WALNUT K/D ONLY ▼


SIZE: 2" X 6" Wider, Length 7' & up
3" X 6" Wider, Length 7' & up



ASH WOOD ▼

S/D & K/D SIZE: 2" X 6" Wider, Length 7' & up
3" X 6" Wider, Length 7' & up



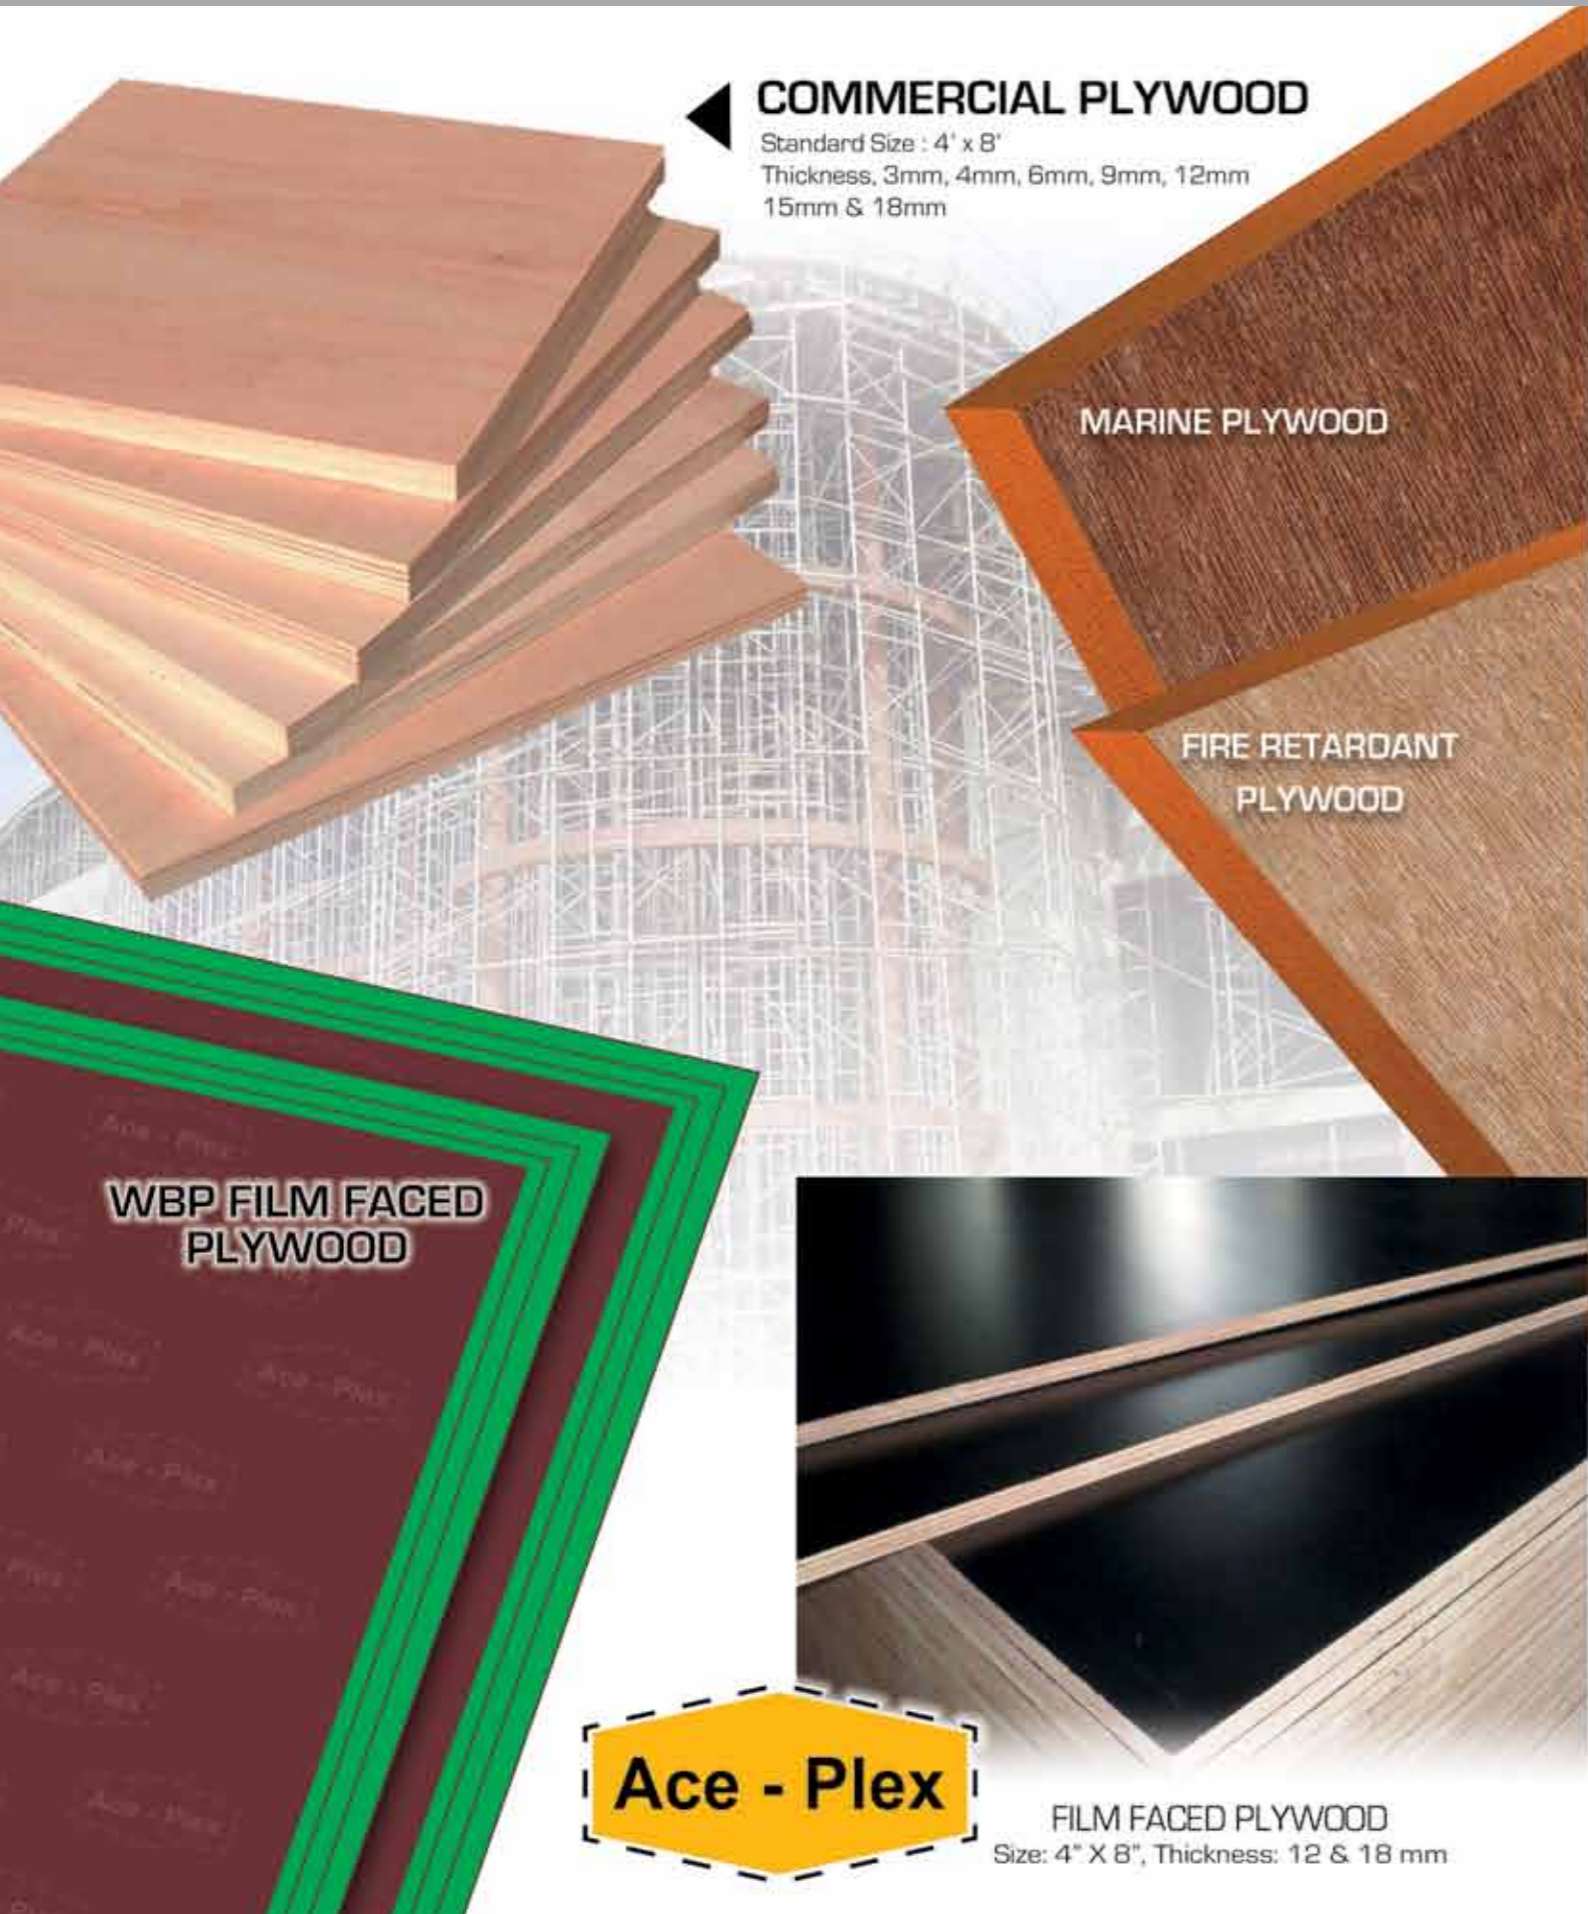

COMMERCIAL PLYWOOD
Standard Size : 4' x 8'
Thickness, 3mm, 4mm, 6mm, 9mm, 12mm
15mm & 18mm

MARINE PLYWOOD

FIRE RETARDANT PLYWOOD

WBP FILM FACED PLYWOOD

Ace - Plex

FILM FACED PLYWOOD
Size: 4" X 8", Thickness: 12 & 18 mm

VENEER PLYWOOD



VENEER PLYWOOD
Size: 4" X 8", Thickness: 3.6 mm

Tubular Chipboard

Thickness, 33mm & 38mm



BENDY PLYWOOD

Standard Size : 4' x 8', Thickness, 5mm & 8mm
Bend Type: Vertical & Horizontal



FLOORING

- LAMINATED HDF FLOORING
- SEMI SOLID & SOLID WOOD FLOORING





Stainless Steel & Aluminium

Hot Rolled Sheets, Cold Rolled Sheets, Angles, Flat Bars, Round Bars, Chequered Sheets, Hollow Tubes.



Tubing & Piping

Square Hollows (SHS) Rectangle Hollows (RHS), Seamless Pipes, Pipe Fittings.



Steel

Structural Steel & Deformed Bars.



Cement (Ordinary Portland)

National Cement, Al Ain Cement and United Cement.



Deformed Bars

ALUBOND U.S.A APPLICATIONS




PRODUCT ADVANTAGES

- **LIGHTWEIGHT** yet extremely rigid and flat resulting in an economical option for high quality building facades and interior cladding.
- **WEATHER RESISTANCE** combined with high acoustics, thermal and fire rated values.
- **EXTENSIVE CHOICE** of finishes including Solid, Metallic, Granite, Veneer, and Chameleon Colors.
- **HIGHLY MALLEABLE** gives flexibility of shapes making it a versatile panel to achieve complex design solutions.



Alubond
U.S.A
Fire Rated Metal Composites

PRODUCT COMPOSITES

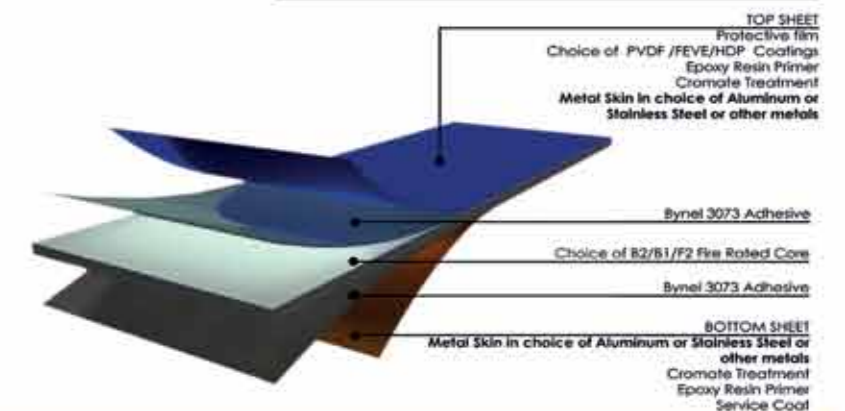

PANEL DIMENSIONS

STANDARD WIDTH	1000mm and 1250mm
AVAILABLE WIDTHS	1500mm, 1550mm, 1800 mm
STANDARD LENGTH	Upto 6000 mm
AVAILABLE LENGTH	Custom order upto 11000 mm
AVAILABLE THICKNESS	3mm - 6mm
AVAILABLE SKIN THICKNESS	0.3mm - 0.5mm


PANEL TOLERANCE

LENGTH	+/- 0.95 mm
WIDTH	+/- 0.47 mm
THICKNESS	+/- 0.020 mm for 3 mm to 6 mm thickness
BOW (LENGTH AND OR WIDTH)	Maximum 0.8%
SQUARENESS	Maximum 0.635 mm
SKIN THICKNESS	+/- 0.05 mm

DISTRIBUTOR IN OMAN


Knauf Gypsum Boards

Vast range of gypsum boards in various sizes and thicknesses to meet all kinds of drywall application requirements. Knauf RG (Regular) board for standard applications, Knauf MR (Moisture Resistant) board for humid areas, Knauf FR (Fire Resistant) board for fire protection, Knauf FM (Fire and Moisture Resistant) board for fire protection in humid areas, Knauf Piano Soundshield board for improved sound protection and Knauf Diamant board for impact resistance requirements.

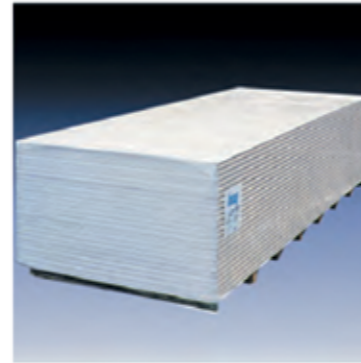

AQUAPANEL® Cement Boards

AQUAPANEL® Cement Board Indoor for tile backing in wet and humid area and AQUAPANEL® Cement Board Outdoor for exterior facade and ceiling applications. A complete set of accessories is available along with the boards to form certified systems.

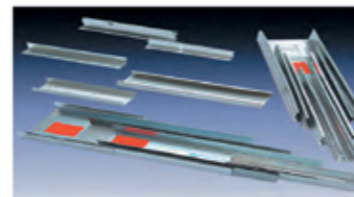

Knauf Metal Sections

Galvanized steel profiles used to form the substructure of Knauf partitions, wall linings and ceilings. Complying with ENBS and ASTM standards.




Knauf Joint Compounds

Various joint compound options are available for joint treatment and smooth surface finishing. Knauf Readyfix for joint filling and surface finishing by manual or machine based applications.

Knauf Access Panels

Various types of access panels with sizes from 200x200mm up to 1200 x1200mm. Many choices from moisture resistant, fire resistant and perforated acoustic alternatives for flexible designs.

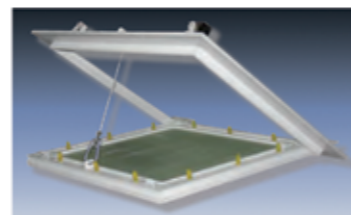

Knauf Drywall Tools


Full set of sophisticated drywall tools which increase the efficiency and quality of drywall applications.



DEALER: FOR UAE AND OMAN



Products Description

This panel is designed to fit into the structural membrane of jointless plasterboard ceiling system. It is supplied with a braded frame to allow for tape and jointing on site and comes complete with a fully removeable flush door. It is inserted directly into a pre-cut hole through the face of the ceiling prior to wet finishes being applied.

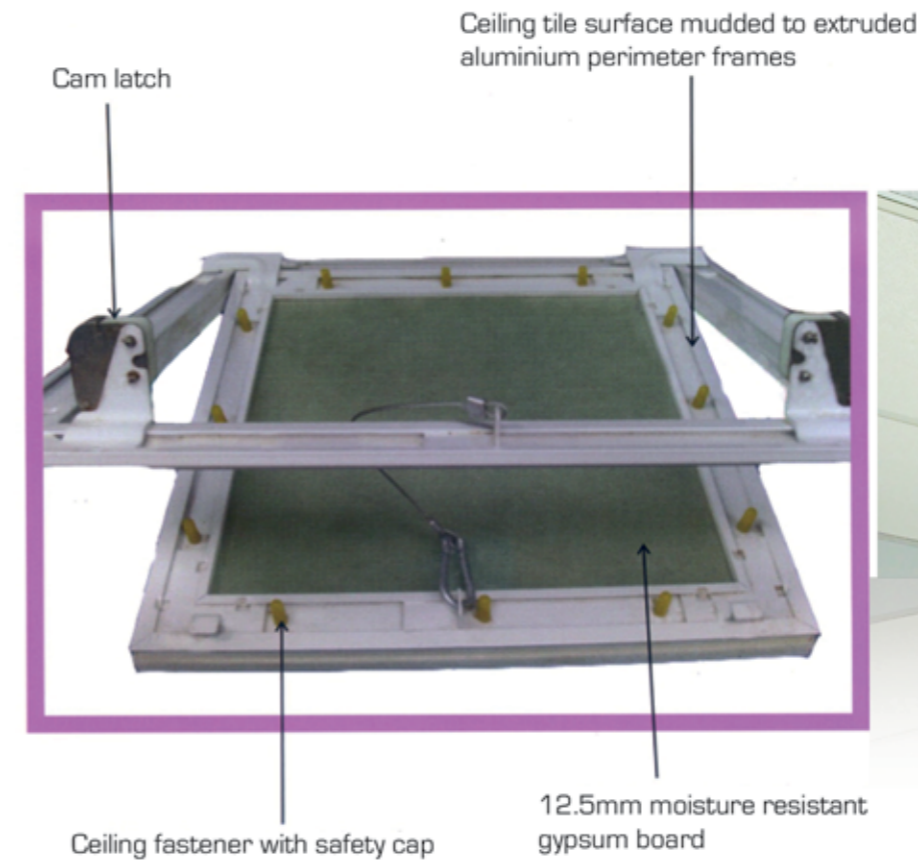

Product Features

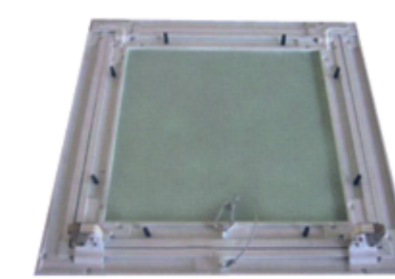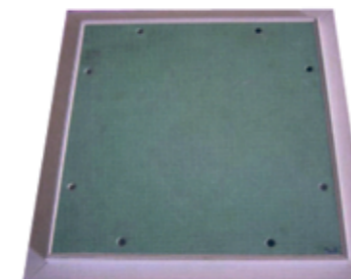

- Strong aluminium frame and hardware
- 12.5mm moisture-resistant gypsum board inlay
- Standard sizes shipped from stock
- Concealed touch latch standard on all doors
- Removable door panel, with safety cables
- Mounting screws enclose



Dimensions

Inner (m/m)	Outer (m/m)
200 x 200	350 x 350
300 x 300	450 x 450
400 x 400	550 x 550
450 x 450	600 x 600
500 x 500	650 x 650
600 x 600	750 x 750
600 x 1200	750 x 1350

M A D E I N U A E

BRANDS :  




ISLAMIC



ELEFOIL



SAFARI

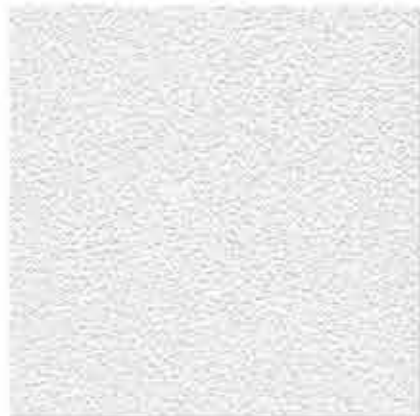


NEW SHADE




FLEX FOIL



ALLURA

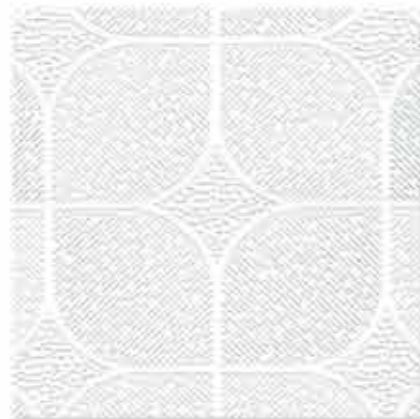

PEARL

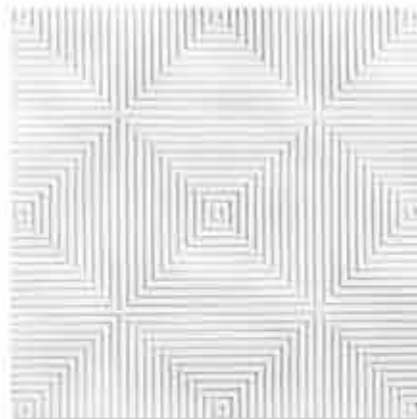

DIAMOND



LOUVER LIGHT
60X60 CM

Vinyl Gypsum Ceiling Tiles

Specification

For Metric grids: 600 x 600 mm (tiles actual size: 593 x 593mm)
600 x 1200mm (tiles actual size: 593 x 1193mm)

For Imperial grids 2' x 2' (tiles actual size: 603 x 603mm)
2' x 4' (tiles actual size: 603 x 1213mm)

Suitable grids :



Edge: Square



Face: Textured washable vinyl

Available packing: 6,8 or 10 tiles in a White carton

Available thickness: 7mm, 8mm & 9mm

Confirming to:	DIN	18180
	BS	1230
	ASTM	C36
	JIS	A6901

Fire Protection

Gypsum boards are one of the best products for fire protection, and it provides excellent fire resistant properties.

Test approved: BS 476 Part 6: 1981

For fire propagation for products

BS476 Part 7: 1971 meet Class 1


Surface spread of flame test for materials

Physical Specification

Material	Top-quality gypsum board
Surface coating	Embossed vinyl facing for front and aluminium foil for back side
Moisture rate	2%
Sagging resistant properties	Warranty against visible sag
Noise reduction coefficient	0.1-0.3
Thermal conductivity	0.16 WL/mK
Humidity resist	Resistant to 95% humidity and standing water
Light reflectance	0.75

Handling and Storage

Our gypsum ceiling tiles should always be carried on the edge, and when stacking the tiles to ensure the vinyl surface are facing each other. Also the tiles should be kept in dry area and on a flat surface.

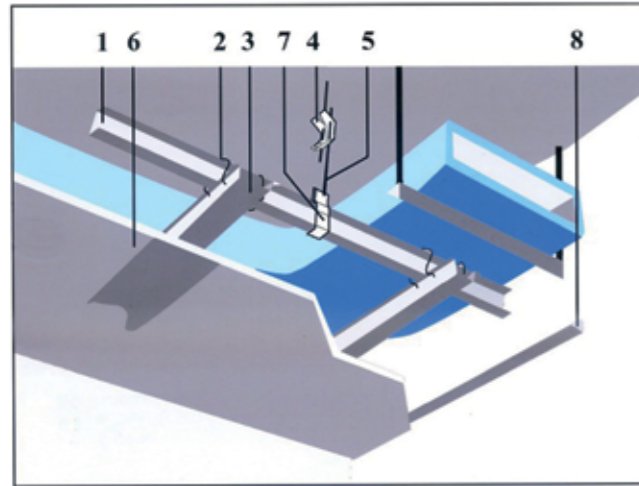


BRANDS :

1. Main Channel
2. Wire Coupling Clip
3. Furring Channel
4. Adjustable Clip
5. Wire Hanger
6. Gypsum Board
7. Channel Bracket
8. G.I. Angle

Installation Steps


1. Use gunpower nailing to secure the wire hangers on the ceiling.
2. Combine wire hangers and the adjustable clips, and adjust it according to the expected height of ceiling.
3. Combine the wire hangers with the channel bracket to suspend the main channel.
4. Tie the furring channels to the main channels by the wire coupling clips.
5. Screw up the G.I. angle on the wall.
6. Fix the gypsum boards on the surface of furring channels and the G.I. Angles.

Furring Channel

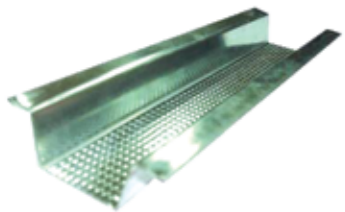

A (mm)	B (mm)	C (mm)	THICKNESS
35	22	68	0.45 to 1.0 mm

Main Channel

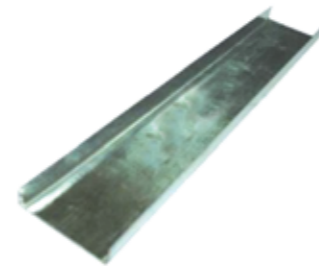

A (mm)	B (mm)	THICKNESS
10	38	0.45 to 1.0 mm

Accessories

Adjustable Clip: Use the adjustable clip to suit different height of suspension systems.


Channel Bracket: Suspended by wire hanger Used to fix the main channel.

Wire Coupling Clip: For coupling main channel and furring channel.

Wire Hanger: For hanging different type of suspended systems.





G.I. Angle

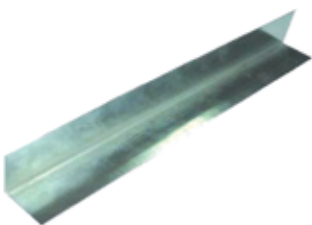



A (mm)	B (mm)	THICKNESS
24	24	0.45 to 1.0 mm

BRANDS :

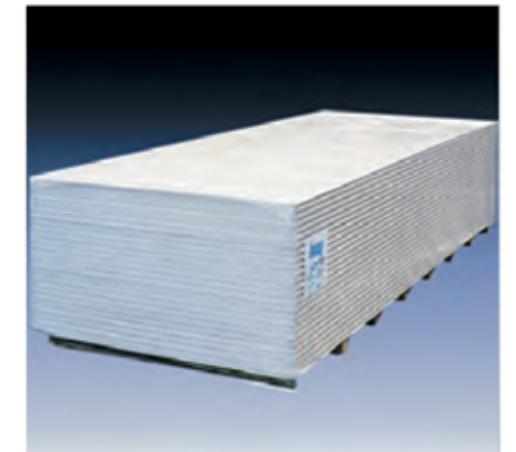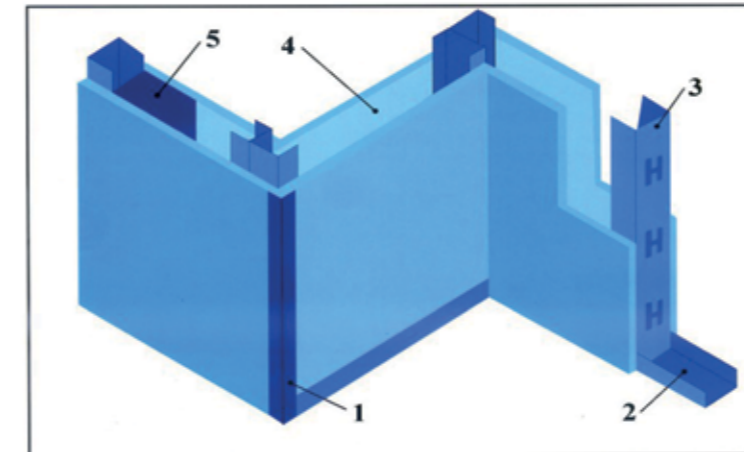


STUD

A (mm)	B (mm)	C (mm)	Thickness
50	32 / 34.5	5	0.45 to 1.0mm
70	32 / 34.5	5	0.45 to 1.0mm
98	32 / 34.5	5	0.45 to 1.0mm
146	32 / 34.5	5	0.45 to 1.0mm

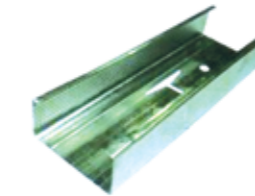

TRACK


A (mm)	B (mm)	Thickness
52	25	0.45 to 1.0mm
72	25	0.45 to 1.0mm
100	25	0.45 to 1.0mm
148	25	0.45 to 1.0mm

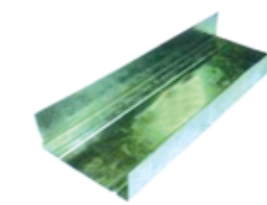

1. Dry wall Angle
2. Track
3. Stud
4. Gypsum
5. Insulation

ACOUSTIC PANEL



Dimension		Nominal Density Kg/m3	Thickness mm
Width m	Length m		
0.60	1.20	60-100	25-100

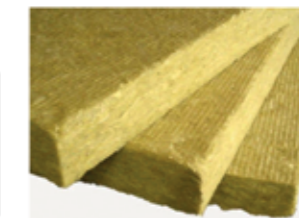

Technical Specification Table

Material	According to Standard
Galvanized Steel	BS 2982: 1992 BS EN 10142: Fe P02G BS EN 10143: OR JIS G 3302 SGCC ASTM A366/A366M-A653/A653M
Coating	Range Between Z120,Z180,Z220,Z275 (Hot dip galvanized) ASTM A366/A366M-A653/A653M
Manufactured	BS 2994:1976 BS 5234:1975 BS 7364:1990 ASTM C 645-99
Fire Rating for Furring system using two layer of 12.5mm gypsum boards	BS 476: Part23: 1987 Section 5 ASTM: E 119.00a

DRY WALL ANGLE

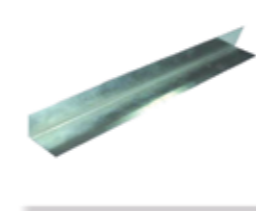

A (mm)	B (mm)	THICKNESS
24	24	0.45 to 1.0 mm

Specification

Thickness: 6mm 9mm 12mm
Board Size: 1200 x 2400mm (Metric)
1220 x 2440mm (Imperial)

Physical Property

Density: 1.0 ~ 1.3 g/cm³
Moisture content: 12%
Water absorption: 60%
Thermal conductivity: average $\leq 0.20W/MK$
Bending strength : transverse $\geq 8.5N/mm^2$, Vertical $\geq 6.0N/mm^2$
Pulling-out force of screw: 70 N/mm
Anti-flex cracking strength: 10 MPa
Anti-freeze: no distortion after 25 repeated cycles of freezing and thawing
Water impermeability: through water immersing for 24HR, no water drop appeared on bottom surface.

Laboratory Test Pass

Non-combustibility found: conform to BS 476:
Part 4: 1970.
Radioactivity: conform to GB6566-2001A Class

CALCIUM SILICATE CEILING TILE

Specification

Thickness: 6mm 9mm
Board Size: 600 x 600mm (tile actual size: 595x595mm)
600 x 1200mm (tile actual size: 595x1195mm)

Physical Property

Density: 1.0 ~ 1.1g/cm
Moisture content: 10%
Thermal conductivity: average=0.20W/MK

Installation

1. Main Runner, 2. Cross Tee, 3. Wall Angle, 4. Calcium Silicate Ceiling Tile
5. Hanger Wire


BRAND: **MOD Classic**



Calcium Silicate Board



Cement Fiber Board

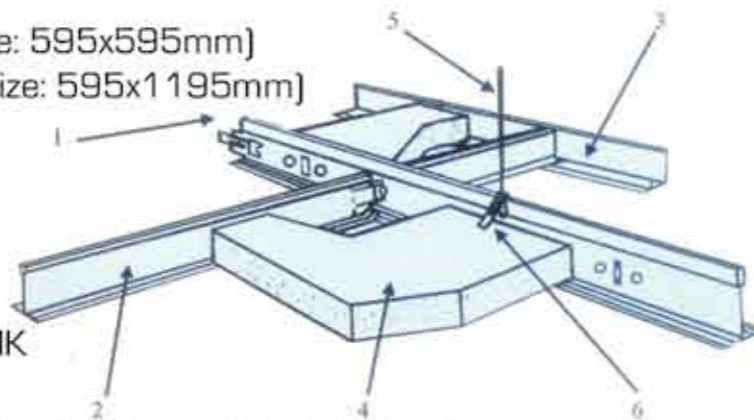

BRANDS: **MOD Classic KNAUF HADLEY USG**

Click-in System T-24 & T-15

Main Runner 3.6M or 12'

Cross Tee 1.2M or 4'



Size	L	TK (mm)	W (mm)	H (mm)	Position
Metric	3.6M	0.38/0.36	24	38	25
Metric	3.6M	0.36	24	32	25
Imperial	12'	0.35/0.34	24	38	25
Imperial	12'	0.36	24	35	25




Size	L	TK (mm)	W (mm)	H (mm)	Position
Metric	1.2M	0.38/0.37	24	25	50
Imperial	4'	0.38/0.37	24	25	50

Cross Tee 0.6M or 2'

Wall Angle 3.6M & 3.0M



Size	L	TK (mm)	W (mm)	H (mm)	Position
Metric	0.6M	0.38/0.37	24	25	75
Imperial	2'	0.38/0.37	24	25	75



Size	L	TK (mm)	W (mm)	H (mm)	Position
Metric	3.6M	0.40	24	24	40
Metric	3.0M	0.40	24	24	40
Metric	3.6M	0.40	22	22	40
Metric	3.0M	0.40	22	22	40


Installation



- 1 Main runner
- 2 Cross Tee 1200
- 3 Cross Tee 600
- 4 panel



Ultra-Line T-15 Ceiling Grids (Black Groove)

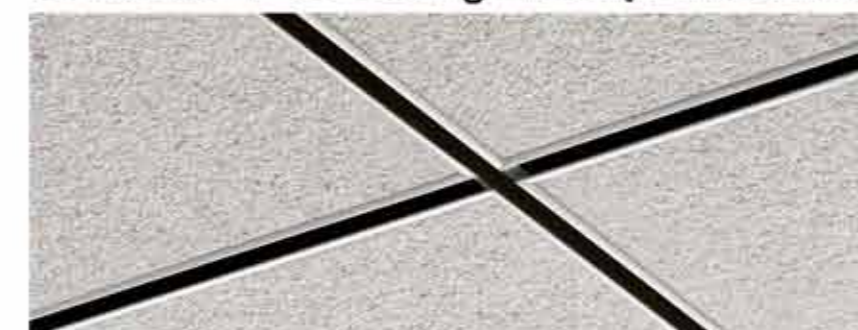

BRANDS :   



Specification

For Metric grids 600 x 600 mm (tiles actual size: 593 x 593mm)
600 x 1200mm (tiles actual size: 593 x 1193mm)

For Imperial grids 2' x 2' (tiles actual size: 603 x 603mm)
2' x 4' (tiles actual size: 603 x 1213mm)

Physical Data

Requirement Test	Remarks	Verdict
Surface Coating	Vinyl emulsion paint	
Color	White	
Density	280 - 340kg/m ³	Pass
Fire resistant	Class A	Pass
Sound absorption	NRC 0.6 ~ 0.7	Pass
Thermal Conductivity	0.0408W (m.k)	Pass
Thermal Resistance	1.96m ² K/W	Pass
Bending Resistance	126N	Pass



BRANDS :  

Physical Property


Material: Aluminium - alloy 3003
Surface: High qualified power painting
smoke density grade : 8
Average smoke temperature : 111C
Sound absorption coefficient: ISO 354
Certificate Standard: BS476, Part 6, 1989
BS476, Part 7, 1971
ASTM E84-04





Material: Aluminum
Galvanized Steel
Color: RAL 9003 or RAL 9010
Available Size: 300 x 600mm
600 x 600mm
600 x 1200mm

Popular Thickness: 0.6mm/ 0.7mm & 0.8mm, Type: Lay-in and clip-in.

Accessories

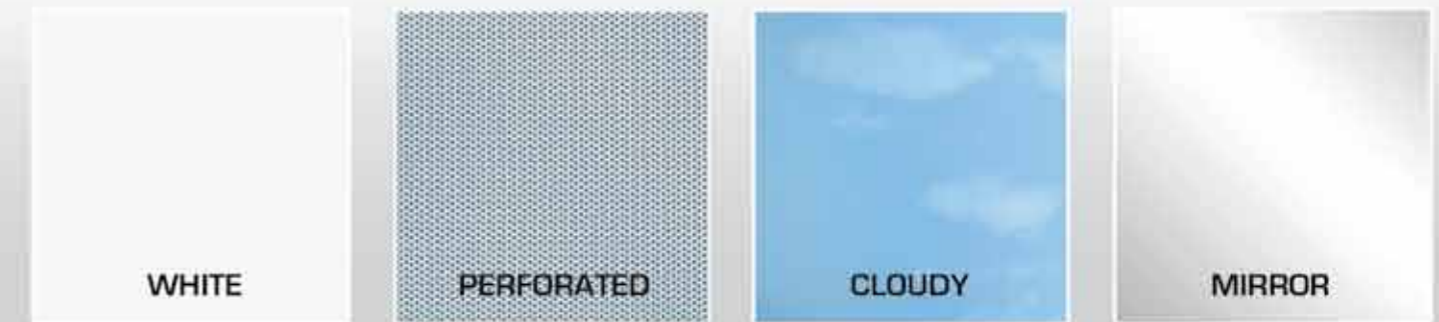


Installation

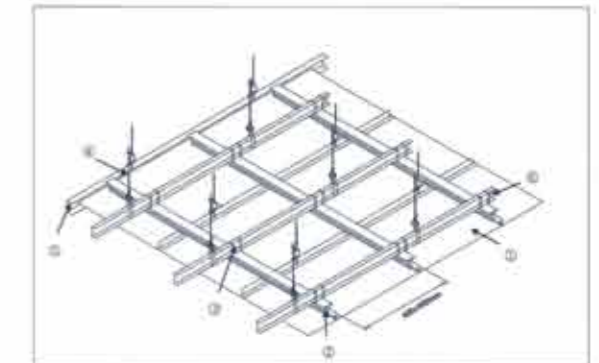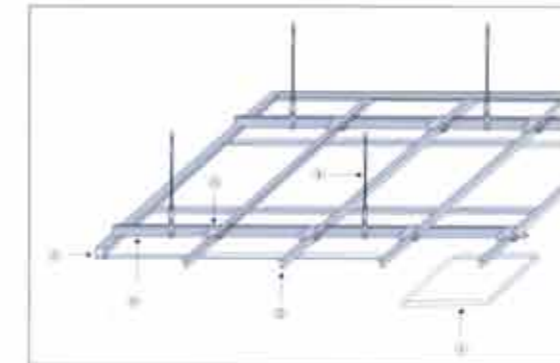

① Metal Ceiling ② Spring Tee ③ Bracket For Spring/Wire Clip ④ Thread Rod/Wire with Adjustable Clip
⑤ Alu.Edge Trim ⑥ Main Channel



Breem A+ rating products in 100% nylon with bitumen backing
Available in 50x50 tiles & rolls (Few Models) with 10 years warranty

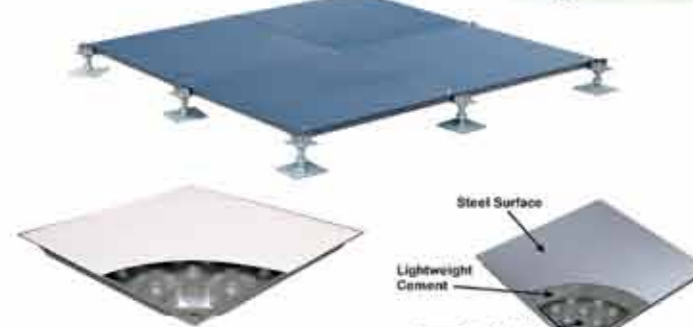

Concrete Core Steel Raised Floor
600mm x 600mm x 35mm
Steel Structure Top & Bottom
steel plate welded,
cementitious infilled core in
bare/HPL/PVC finished.

HARDWARE





Magnetic Catcher



KD Fitting



Router Bit



Hinge Bit



Wood Hole Saw



SS & Concrete
Hole Saw



Cutting Disc
& Cup Brush.




Grinding Disc



Tower Bolts



Flange Bracket

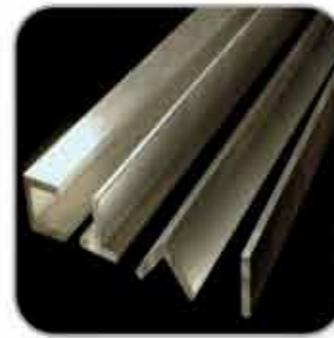

Aluminium Profiles



CP & Oval Pipes



Drawer Railing



Screws



Rivet & Nails



Sanding & Flap Disc



Wire Cap



H/R Door Stopper




Door Fittings



Door Stopper



Concealed Hinges

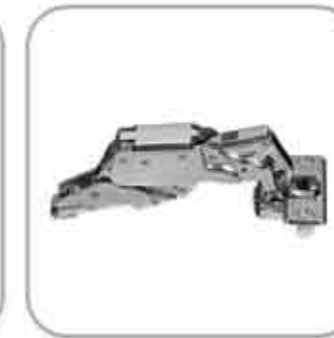

180° Hinges



Full Extension
Drawer Slide



Concealed Drawer Slide



Bathroom Sign



Caster Wheel



Caster Wheel



L - Bracket



Self Support



Magnetic Catcher



Door Hinges



Spring Nut



Router Bit Bearing
& SDS Bits



Kitchen Legs



Chair Nail



Star Bit



Drill Bits



Drill Bits Set



Door Closer



Drawer Locks



Drawer Handles & knob



Door Cylinder



Door Closer



D o o r H a n d l e s



Hex & Through Bolt



Fix Bolt



Shield & Unifix



Bolts



Thread Bar



Dome & Long Nuts



Washer




Hex Nut



Wheel Barrow



Construction Item

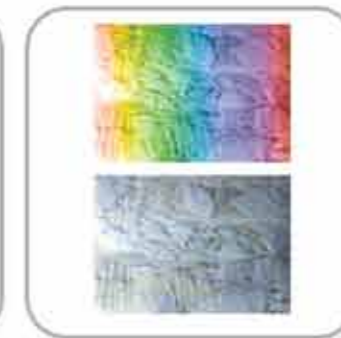

Cotton Rags



Wood & Mirror Screws



Turn Buckle



U Bolt



D-Shackle



GI & PVC Chain



Stanley Planer



Stanley Drill



Stanley Drill



Stanley Saw



Stanley Angle Grinder



Stanley Jigsaw



Makita Polisher



Makita Trimmer



Makita Drill



Makita Brad Nailer



Makita Grinder



Makita Sander
& Blower



Makita Planer



Makita Polisher



Makita Grinder



Makita Cutter



Stanley Screw Driver



Stanley Bit Set



Stanley Snip Cutter
& Chisel



Stanley Level



Stanley Cutter



Stanley Pliers



Stanley Stapple



Stanley Chalk
Line Set



Stanley Planner



Stanley M/Tape



Stanley Glue Gun



Stanley Hammer



Jetch Hand Tools



Protech Hand Tools



Safety Light



Safety Hand Gloves



Safety Product



Safety Net & Harness



Safety Helmet



Safety Goggles



Safety Jacket



Safety Coverall



Electric Tape



Cable Tie



Oman Wire



PVC Fittings



Wire



Switch & Sockets



Full Gauge Wire



Italco Wire & Clips



Safety Shoes



Bison Kit



Double Sided Tape



Carpet Tape



PU Foam



Pattex Adhesive



M-Seal & One Drop Adhesive



Silicone



Hotmelt



Membrane & Heatshield



Tile Glue



White Glue



Nail Free Adhesive



Rust Remover



Gypsum Powder



Adhesive



Polythene Sheets



Wellcoat



Wellcoat



Thinner



Paint Refil



Paint Roller



Paint Tray



Paint Refil



Extention Pole



Sanding Paper & Roll



Spray Paint



Paint Gun



Artist Brush



Paint Brush



Paint Scraper



Paint Accessories



FOR UAE ONLY



Alum. Square Tube



Alum. Flat Bar



Alum. Angle



Alum. Pipe



Alum. W-Channel



Carpet Profile



Tile Trim



Carpet Profile



Alum. U-Channel



Alum. T-Bar



Aluminium Ladder



Masking Tape



Duct & Alum. Tape




Brown & Clear Tape



Air Bubble



Foam Roll

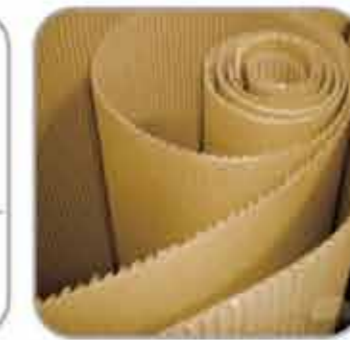

Corrugated Roll



Stretch Film

ACRYLIC SHEETS



Thermocool